



Global Challenges, Innovative Solutions.

model
NBK-4

NITROGEN BACKPACK KIT P/N:410610

Equip your technicians with Cv International's lightweight wearable high pressure nitrogen delivery backpack. The NBK-4 is the latest and most efficient system for supplying, interfacing, and controlling high pressure nitrogen (up to 4500 psig). Be prepared for tough conditions; mud, sand or snow. If technicians can reach the equipment in need of servicing, they can reach it with controlled, pressurized nitrogen.



AGILE, INNOVATIVE.

www.cvintl.com

Lightweight Portable Nitrogen Supply - Our high pressure service kit consists of a metal enclosure, housing high pressure components. Externally the enclosure is equipped with a Shut-off/Bleed valve and QDC's for hose connections.

Backpack Cylinder Assembly - A lightweight aluminum vessel with carbon fiber wrap and epoxy coating, DOT approved and in service with many Cvi (MANCS) Mobile Air/Nitrogen Charging Systems. Fitted with high pressure shut-off valve, burst disc and pressure gauge. Valve is fitted with a male quick disconnect fitting for service attachment.

Backpack Harness Assembly - A premium lightweight harness assembly similar to that worn by SCUBA/Special Ops units. Has a padded back plate with heavily padded shoulder straps and a wide adjustable waist belt to affix the high and low pressure service kits.

Transport Case Assembly - The optional, reusable Transport Case houses all components of the NBK-4 for storage, use and transport. It is made of high impact plastic and features heavy duty wheels and retractable carry handles. The case is MIL-STD-4150-J rated.



NBK-4

SERVICE KITS


High Pressure Service Kit (HPSK)

The high pressure service kit contains an aluminum enclosure housing a "Supply Pressure" gauge (0-5000 psig), a high pressure "Pressure Regulator" valve (0-5000 psig) and a "Fill Pressure" gauge (0-5000 psig) along with miscellaneous internal pneumatic components. The outlet side of the HPSK enclosure has a check valve and combination shut-off/bleed valve. Attached to the shut-off valve is a 48 inch long high pressure service hose that terminates with a high pressure service chuck for high pressure servicing.

Optional Transport Case



MODEL NBK-4

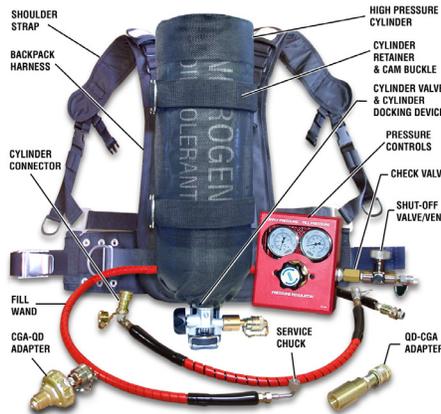

- High Pressure Service:**
- 2 Gauge Control Box
 - 4' High Pressure Service Hose
 - 28" High Pressure Hose
 - High Pressure Service Chuck

- Backpack Cylinder Assembly:**
- Length: 25.5 in
 - Diameter: 6.9 in
 - Cylinder Pressure: 4,500 psig
 - Cylinder Capacity: 88 scf

NBK-4

Part Number: 410610